

FORM PTO-139 (Modified)  
(REV 10-95)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

1494

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

**09/806101**

INTERNATIONAL APPLICATION NO.

**PCT/DE 00/02347**

INTERNATIONAL FILING DATE

**JULY 19, 2000**

PRIORITY DATE CLAIMED

**JULY 27, 1999**

TITLE OF INVENTION

**DRIVE SYSTEM FOR MOTOR VEHICLES**

APPLICANT(S) FOR DO/EO/US

**Peter AHNER, Manfred ACKERMANN**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

**Items 13 to 18 below concern document(s) or information included:**

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.  
A **SECOND** or **SUBSEQUENT** preliminary amendment.
16. ☐ A substitute specification.
17. ☐ A change of power of attorney and/or address letter.
18. ☒ Certificate of Mailing by Express Mail
19. ☐ Other items or information:

*EF2159533494S*



09/806101

JC10 Rec'd PCT/PTO 2 6 MAR 2001

## UNITED STATES PATENT AND TRADEMARK OFFICE

Examiner: Group: Attorney Docket # 1494

Applicant(s) : AHNER, P., ET AL

Serial No. :

Filed : Simultaneously

For : DRIVE SYSTEM FOR MOTOR VEHICLES

## SIMULTANEOUS AMENDMENT

March 23, 2001

Honorable Commissioner of Patents and Trademarks  
Washington, D.C. 20231

S I R S:

Simultaneously with filing of the above identified application  
please amend the same as follows:

In the Claims:


Cancel all claims without prejudice.

Substitute the claims attached hereto.

## REMARKS:

This Amendment is submitted simultaneously with filing of the above identified  
application.With the present Amendment applicant has amended the claims so as to eliminate  
their multiple dependency.Consideration and allowance of the present application is most respectfully  
requested.

Respectfully submitted,

  
Michael J. Striker  
Attorney for Applicant(s)  
Reg. No. 27233

09/806101

JC10 Rec'd PGI/PIU 2 6 MAR 2001

## Claims

1. A drive system for motor vehicles, in particular having an internal combustion engine (13) as its main drive, a driving clutch (15), a transmission (16) and at least one drive axle (17) in the main drive train (10), furthermore having a secondary drive train (11) and having secondary assemblies (19) which can be disposed in the secondary drive train (11), the secondary drive train (11) being capable of being coupled to the main drive train, and having an electric machine operating as a starter generator (20), characterized in that the secondary drive train (11) has its own secondary assembly drive (22) which can be coupled to the starter generator (20), and that the secondary assembly drive (22) and the starter generator (20) can be coupled to the driving axle (17) of the motor vehicle either individually or jointly, with or without the main drive (13), to drive the motor vehicle.

2. The drive system of claim 1, characterized in that the main drive (13) or the secondary assembly drive (22) can be decoupled from the respectively selected drive (13 or 20 or 22) of the motor vehicle.

3. The drive system of claim 1, characterized in that the main drive and the secondary assembly drive (22) are each an internal combustion engine, and the power of the secondary assembly drive (22) is less than half the power of the engine (13) in the main drive train (10).

4. The drive system of claim 1, characterized in that for starting, the secondary assembly drive (22) is coupled to the starter generator (20) via a shift clutch (21).

5. The drive system of claim 4, characterized in that for starting, the main drive (13) can be coupled to the running secondary assembly drive (22).

6. The drive system of claim 1, characterized in that the secondary assembly drive (22) and the starter generator (20) are connected to the main drive train (10) via an intermediate gear (18).

7. The drive system of claim 6, characterized in that the intermediate gear (18) is connected on the inlet side to the starter generator (20) and on the outlet side can be decoupled both from the transmission (16) via the driving clutch (15) and  
5 from the main drive (13) in the main drive train (10) via an auxiliary clutch (14).

8. The drive system of claim 7, characterized in that in starting of the secondary assembly drive (22), the driving clutch (15) and the auxiliary clutch (14) in the main drive train (10) are opened.

9. The drive system of claim 8, characterized in that for direct starting of the secondary assembly drive (22), the driving clutch and the auxiliary clutch (15, 14) are opened, and the shift clutch (21) is closed.

10. The drive system of claim 8, characterized in that for impulse starting of the secondary assembly drive (22), the auxiliary clutch, driving clutch and shift clutch (14, 15, 21) are opened, and that the shift clutch (21) should be closed only after the starter generator (20) has run up to speed.

11. The drive system of claim 9, characterized in that by means of detection of the temperature of the secondary assembly drive (22), its starting operation can be switched over between direct starting and impulse starting as a function of temperature.

12. The drive system of claim 7, characterized in that for direct starting of the main drive (13) with the secondary assembly drive (22) running, the driving clutch (15) is opened, and the auxiliary clutch (14) and the shift clutch (21) are closed.

13. The drive system of claim 7, characterized in that for the impulse starting of the main drive (13) with the secondary assembly drive (22) running, the driving clutch (15) is opened, the shift clutch (21) is closed, and the auxiliary clutch (14) should be closed only after the intermediate gear (18) has run up to speed.

14. The drive system of claim 12, characterized in that by means of detection of the temperature of the main drive (13), its starting operation can be switched over between direct starting and impulse starting as a function of temperature.

15. The drive system of claim 14, characterized in that both in direct starting and in impulse starting of the main drive (13), the starter generator (20) in the motor mode is jointly activated.

16. The drive system of claim 7, characterized in that for starting the secondary assembly drive (22), the starter generator (20) and the shift clutch (21) can be triggered via a remote-controllable electric controller and supply means (12).

17. The drive system of claim 7, characterized in that for starting the secondary assembly drive (22), the starter generator (20) and the shift clutch (21) can be triggered when the driver door is opened via a door contact (26).

18. The drive system of claim 1, characterized in that when the travel power demand is very low and the battery charge is adequate, only the starter generator (20) is employed for driving the motor vehicle, by means of the electric controller  
5 and supply means (12).

19. The drive system of claim 1, characterized in that when the driving power demand is low, only the secondary assembly drive (22) is used for driving the motor vehicle.

20. The drive system of claim 1, characterized in that when the driving power demand is high, the secondary assembly drive (22) and main drive (13) are jointly used for driving the motor vehicle.



21. The drive system of claim 1, characterized in that when the driving power demand is briefly at maximum, both the secondary assembly drive (22) and main drive (13) as well as the starter generator (20) in the motor mode are used for driving the motor vehicle.

22. The drive system of claim 18, characterized in that the choice of operating mode of the motor vehicle drive, that is, the choice between the main drive (13) and/or the secondary assembly drive (22) and/or the starter generator (20), is made via an electric controller and supply means (12).

23. The drive system of claim 22, characterized in that the choice of operating mode is made as a function of the position of the gas pedal of the motor vehicle, which is detected via a gas pedal sensor (25).

24. The drive system of claim 1, characterized in that the secondary assemblies (19) are drivable either mechanically by the secondary drive train (11) or electrically.

## Claims

1. A drive system for motor vehicles, in particular having an internal combustion engine (13) as its main drive, a driving clutch (15), a transmission (16) and at least one drive axle (17) in the main drive train (10), furthermore having a secondary  
5 drive train (11) and having secondary assemblies (19) which can be disposed in the secondary drive train (11), the secondary drive train (11) being capable of being coupled to the main drive train, and having an electric machine operating as a starter generator (20), characterized in that the secondary drive train  
10 (11) has its own secondary assembly drive (22) which can be coupled to the starter generator (20), and that the secondary assembly drive (22) and the starter generator (20) can be coupled to the driving axle (17) of the motor vehicle either individually or jointly, with or without the main drive (13), to drive the  
15 motor vehicle.

2. The drive system of claim 1, characterized in that the main drive (13) or the secondary assembly drive (22) can be decoupled from the respectively selected drive (13 or 20 or 22) of the motor vehicle.

3. The drive system of claim 1 [or 2], characterized in that the main drive and the secondary assembly drive (22) are each an internal combustion engine, and the power of the secondary assembly drive (22) is less than half the power of the engine (13) in the main drive train (10).

4. The drive system of claim 1, [2 or 3], characterized in that for starting, the secondary assembly drive (22) is coupled to the starter generator (20) via a shift clutch (21).

5. The drive system of claim 4, characterized in that for starting, the main drive (13) can be coupled to the running secondary assembly drive (22).

6. The drive system of [one of the foregoing claims] claim 1, characterized in that the secondary assembly drive (22) and the starter generator (20) are connected to the main drive train (10) via an intermediate gear (18).

7. The drive system of claim 6, characterized in that the intermediate gear (18) is connected on the inlet side to the starter generator (20) and on the outlet side can be decoupled both from the transmission (16) via the driving clutch (15) and  
5 from the main drive (13) in the main drive train (10) via an auxiliary clutch (14).

8. The drive system of claim 7, characterized in that in starting of the secondary assembly drive (22), the driving clutch (15) and the auxiliary clutch (14) in the main drive train (10) are opened.

9. The drive system of claim 8, characterized in that for direct starting of the secondary assembly drive (22), the driving clutch and the auxiliary clutch (15, 14) are opened, and the shift clutch (21) is closed.

10. The drive system of claim 8, characterized in that for impulse starting of the secondary assembly drive (22), the auxiliary clutch, driving clutch and shift clutch (14, 15, 21) are opened, and that the shift clutch (21) should be closed only after the starter generator (20) has run up to speed.

11. The drive system of [claims 9 and 10] claim 9, characterized in that by means of detection of the temperature of the secondary assembly drive (22), its starting operation can be switched over between direct starting and impulse starting as a function of temperature.

12. The drive system of claim 7, characterized in that for direct starting of the main drive (13) with the secondary assembly drive (22) running, the driving clutch (15) is opened, and the auxiliary clutch (14) and the shift clutch (21) are closed.

13. The drive system of claim 7, characterized in that for the impulse starting of the main drive (13) with the secondary assembly drive (22) running, the driving clutch (15) is opened, the shift clutch (21) is closed, and the auxiliary clutch (14) should be closed only after the intermediate gear (18) has run up to speed.

14. The drive system of [claims 12 and 13] claim 12, characterized in that by means of detection of the temperature of the main drive (13), its starting operation can be switched over between direct starting and impulse starting as a function of temperature.

15. The drive system of claim 14, characterized in that both in direct starting and in impulse starting of the main drive (13), the starter generator (20) in the motor mode is jointly activated.

16. The drive system of claim 7, characterized in that for starting the secondary assembly drive (22), the starter generator (20) and the shift clutch (21) can be triggered via a remote-controllable electric controller and supply means (12).

17. The drive system of claim 7, characterized in that for starting the secondary assembly drive (22), the starter generator (20) and the shift clutch (21) can be triggered when the driver door is opened via a door contact (26).

18. The drive system of [one of the foregoing claims] claim 1, characterized in that when the travel power demand is very low and the battery charge is adequate, only the starter generator (20) is employed for driving the motor vehicle, by  
5 means of the electric controller and supply means (12).

19. The drive system of [one of the foregoing claims] claim 1, characterized in that when the driving power demand is low, only the secondary assembly drive (22) is used for driving the motor vehicle.

20. The drive system of [one of the foregoing claims] claim 1, characterized in that when the driving power demand is high, the secondary assembly drive (22) and main drive (13) are

jointly used for driving the motor vehicle.

21. The drive system of [one of the foregoing claims] claim 1, characterized in that when the driving power demand is briefly at maximum, both the secondary assembly drive (22) and main drive (13) as well as the starter generator (20) in the  
5 motor mode are used for driving the motor vehicle.

22. The drive system of [one of claims 18-21] claim 18, characterized in that the choice of operating mode of the motor vehicle drive, that is, the choice between the main drive (13) and/or the secondary assembly drive (22) and/or the starter  
5 generator (20), is made via an electric controller and supply means (12).

23. The drive system of claim 22, characterized in that the choice of operating mode is made as a function of the position of the gas pedal of the motor vehicle, which is detected via a gas pedal sensor (25).

24. The drive system of [one of the foregoing claims] claim 1, characterized in that the secondary assemblies (19) are drivable either mechanically by the secondary drive train (11) or electrically.

11 PRTS

09806101.111302  
JC10 Rec'd PCT/PTO 26 MAR 2001  
09/806101

DRIVE SYSTEM FOR MOTOR VEHICLES

The invention relates to a drive system for motor vehicles having the characteristics recited in the preamble to claim 1.

5 Prior Art

10 In the very great majority of motor vehicles, an internal combustion engine is provided in their drive system as the main drive; this engine is coupled to one or more driving axles in the main drive train via a driving clutch and a transmission. Secondary assemblies, such as pumps, compressors, air  
15 conditioners, and electric consumers, such as power controls, are increasingly used in motor vehicles; they are driven via a secondary drive train that is coupled with the main drive train of the motor vehicle.

20 It is also known, for reducing environmental pollution, to use hybrid drives in motor vehicles; then the drive system has both an internal combustion engine and an electric machine for selectively driving the motor vehicle. Once again, the internal combustion engine and the electric machine are located in the main drive train of the motor vehicle, and only the internal combustion engine is used to drive the secondary  
25 assemblies.

From German Patent Disclosure DE 197 50 497 A1, it is also known to operate the secondary assemblies in the motor vehicle with the main drive of the motor vehicle via an intermediate gear; the secondary assemblies also

have an electric machine as a starter generator, which on the one hand for starting the engine operates as an electric motor in the main drive train and on the other, for supplying the on-board vehicle electrical system, operates in the generator mode for charging an accumulator battery.

Such vehicle concepts, optimized especially with regard to fuel consumption, require among other things that the engine in the main drive train be shut off when the vehicle is stopped at traffic lights; that is, they require a start and stop mode and a shutoff or disengagement of the engine in overrunning phases, that is, in the inertia-utility mode. Compared with conventional vehicles, this means approximately ten times as many starting cycles, that is, from 400,000 to 600,000 starting cycles. The additional starting cycles are essentially repeat starts, that is, starts with the engine at operating temperature. For these repeat starts, especially fast, quiet starting is demanded. On the other hand, in these motor vehicles, for reasons of comfort, up to five times more generator power is needed compared with conventional vehicles, especially since electrically triggered and operated secondary assemblies function more favorably in terms of consumption. In this case, generator power levels of more than 5 kW are desired. In addition, this power is sometimes needed even in engine idling, that is, for crankshaft speeds of less than 700 rpm, which cannot be achieved with the claw pole generators that are conventional today.

To make it possible for the starting and power demands in the generator mode to be met with a so-called starter generator, it is known from German Patent



Disclosure DE 197 05 610 A1, to employ so-called impulse starting to reduce the starting power, and to continue to use a conventional, additional starter for extremely low starting temperatures.

5           In terms of the charge balance, however, concepts that use a starter generator to start the engine in the main drive train both in cold starting and in the start and stop mode are extremely critical, especially since when the electrical system power is high, it is impossible to predict what driving and consumption cycles will have to be handled. The case where there is a demand on an air conditioner while the vehicle is stopped is even less favorable, since the conventional air conditioner compressor would have to be operated from the accumulator battery of the motor vehicle. This requires a cost-intensive design with high capacity and performance, which in turn tends to increase fuel consumption.

10           It has also already been proposed, in the earlier German Patent Application DE 198 529 41.4 that the secondary assemblies be driven by an additional secondary assembly drive, embodied as a smaller internal combustion engine; these secondary assemblies also include a starter generator, which is used in the generator mode on the one hand to supply the vehicle electrical system and on the other in the motor mode to start the secondary assembly drive. The main drive is started from the secondary assembly drive via a clutch and is then decoupled from the secondary assembly drive again.

15           The invention seeks on the one hand to optimize

the drive system for motor vehicles in view of the applicable driving power demand and on the other to optimize the power demand for driving the secondary assemblies.

5 Advantages of the Invention

10 The drive system for motor vehicles according to the invention, as defined by the characteristics recited in the body of claim 1, has the advantage that with the main drive, the secondary assembly drive, and the starter generator, three components for optimizing the power balance in the motor vehicle can be used, especially for optimizing fuel consumption, both individually and in combination, both for driving the motor vehicle and for supplying the secondary  
15 assemblies. With this drive concept, beyond a medium driving power demand, a powerful internal combustion engine is to be used in the main drive train in particular, while an internal combustion engine of lesser power is to be used in particular to drive the secondary assemblies. This secondary assembly drive  
20 also serves to start the engine in the main drive train, or as a drive at low power demand both to support the engine in the main drive train and at very high driving power demand (kick-down). With the provisions according to the invention, not only comfort-related requirements  
25 such as independent air conditioners, but also fast, quiet starting and high on-board electrical system power, as well as sharply reduced fuel consumption, can all be achieved at substantially less expense cost than  
30 in motor vehicles with hybrid drives, by choosing the optimal operating mode. The drive system according to the invention always allows flexible drive and on-board

electrical system management, so that on the one hand the accumulator battery of the motor vehicle, as an electrical energy storage means, can be dimensioned relatively small, and on the other the most favorable combination of the three drives in terms of efficiency and exhaust emissions can always be chosen.

Vehicles with the drive system of the invention have increased operating reliability and enhanced comfort. If the main drive fails, the mobility of the vehicle is maintained by the secondary assembly drive - although to a restricted extent.

Advantageous refinements and features of the invention will become apparent from the other characteristics, recited in the dependent claims.

To avoid the coupled motion of turned-off drives, when the main drive or secondary assembly drive is turned off, this turned-off drive is advantageously capable of being decoupled from whichever drive of the motor vehicle has been turned on.

In view of the graduation in the power of the three drives, it is thus especially advantageous if the secondary assembly drive is a further internal combustion engine, whose power is less than half the power of the internal combustion engine in the main drive train.

In this graduation, for starting the secondary assembly drive, the secondary assembly drive is advantageously to be coupled to the starter generator via a shift clutch. Furthermore, for starting the main

drive, the main drive is expediently to be coupled to the running secondary assembly drive.

5 An economical embodiment is obtained in that the secondary assembly drive and the starter generator are connected to the main drive train via an intermediate gear.

10 Optimal force introduction from the starter generator for starting the secondary assembly drive via the shift clutch is obtained in that the intermediate gear is connected on the inlet side to the starter generator and on the outlet side can be decoupled both from the transmission via the driving clutch and from the main drive in the main drive train via an auxiliary clutch.

15 By temperature detection at the secondary assembly drive, the starting operation of the secondary assembly drive can be switched over between direct starting and impulse starting as a function of temperature. For direct starting of the secondary assembly drive, the driving clutch and the auxiliary clutch in the main drive train are opened, and the shift clutch in the secondary drive train is closed. For impulse starting of the secondary assembly drive, the driving clutch and the auxiliary clutch in the main drive train are opened, and the shift clutch in the secondary drive train is to be closed abruptly only after the starter generator has run up to speed.

20 The starting operation for the internal combustion engine in the main drive train of the motor vehicle can also be switched over as a function of temperature

25

30

between direct starting and impulse starting by means of a temperature detection, and this starting operation also takes place as a function of temperature selectively by means of the starter generator and/or by means of the secondary assembly drive. For direct starting of the main drive with the secondary assembly drive running, the driving clutch is opened, and the auxiliary clutch and the shift clutch are closed. For the impulse starting of the main drive with the secondary assembly drive running, the driving clutch is opened, the shift clutch is closed, and the auxiliary clutch should be closed only after the intermediate gear has run up to speed.

#### Drawing

Further individual features of the invention are described in further detail in the exemplary embodiment described below, in conjunction with the associated drawing.

The drawing schematically shows a drive system according to the invention for motor vehicles, having an internal combustion engine in the main drive train and having both a starter generator and a secondary assembly drive in the secondary drive train.

#### Description of the Exemplary Embodiment

From the drawing, a drive system for motor vehicles can be seen that comprises a main drive train 10 and a secondary drive train 11, as well as a common electric controller and supply means 12 in the on-board electrical system of the motor vehicle. The main drive

train includes an internal combustion engine 13 as its main drive, an auxiliary clutch 14 at the power takeoff of the engine 13, a driving clutch 15, and a conventional transmission 16 downstream of it, whose output shaft is solidly connected to a driving axle 17 of the motor vehicle. Between the driving clutch 15 and the auxiliary clutch 14 in the main drive train 10, there is an intermediate gear 18, which connects the main drive train 10 to the secondary drive train 11. To the extent that they are not driven electrically, at least one secondary assembly 19 to be driven, and optionally operating even if the main drive is shut off or the vehicle is stopped, such as a coolant pump, an oil pump for the lubricant system in the motor vehicle, a pump for the power steering, and a compressor for an air conditioner, are located in the secondary drive train 11. For the sake of better rpm adaptation to their optimal operating range, or for reasons of installation space, not only these secondary assemblies 19, but also as the starter generator 20 and the secondary assembly drive 22, can be connected to the secondary drive train 11 by means of step-up gears. The intermediate gear 18 can also be provided with a step-up means for this purpose. If the secondary assemblies 19 are driven electrically, then the mechanical coupling 27 is omitted. In that case, the secondary assemblies receive their energy supply via the electrical connection 28. Also located in the secondary drive train 11 is a starter generator 20, which is solidly connected to the intermediate gear 18 and to which, via a shift clutch 21, a secondary assembly drive 22 is coupled. Serving as the secondary assembly drive 22 here is a further internal combustion engine, whose power is less than half the power of the internal

combustion engine 13 in the main drive train 10. The electric controller and supply means 12 is connected via electrical lines to the auxiliary clutch 14, the driving clutch 15, the shift clutch 21, the starter generator 20, and in part the secondary assemblies 19, among other elements. It is furthermore connected to the engine 13 and the secondary assembly drive 22 for the sake of temperature detection. In addition, an accumulator battery 23 as an electrical energy storing means, a remote control 24, a gas pedal sensor 25, and a door contact 26 in the driver door of the motor vehicle are connected to the electric controller and supply means 12 in the on-board electrical system of the motor vehicle.

The mode of operation of the drive system according to the invention will now be described in further detail. By the triggering of the three aforementioned clutches 14 and 15, the intermediate gear 18 can be decoupled completely from the engine 13 as a main drive on the one hand, and from the driving axle 17 on the other, by opening of the driving clutch 15 and the auxiliary clutch 14. Thus when the vehicle is stopped, by way of the secondary assembly drive 22 and the starter generator 20 with the shift clutch 21 closed, not only can current be generated, but mechanical power can also be output to the secondary assemblies 19. As a result, flexible supply to electrical and other consumers that is optimal in terms of consumption is achieved. In the normal travel mode, conversely, the secondary assemblies 19 are driven by the main drive train with the engine 13, and the starter generator 20 is operated as needed in the generator mode for charging the accumulator battery 23; see also Table, Case 1.

5 The secondary drive train 11, conversely, is used  
to drive the motor vehicle in the low-load range of the  
vehicle, in that with the driving clutch 15 closed and  
the auxiliary clutch 14 opened, the engine 13 is shut  
off, and the drive power of the motor vehicle is brought  
to bear by the secondary assembly drive 22 with the  
shift clutch 21 closed; see Table, Case 2. As a result,  
for a standardized European trip cycle, over a 30%  
savings in fuel consumption can be attained, compared  
10 with operation using the engine 13 in the main drive  
train 10.

15 By shutting off the engine 13 during idling or in  
the low-load range of the motor vehicle and under  
corresponding peripheral conditions, such as charge  
capacity of the accumulator battery 23, the secondary  
assembly drive 22 can be turned off as well, so that  
with the shift clutch 21 open and the clutches 14 and 15  
open, only the starter generator 20 in the motor mode is  
capable of taking over the drive of the secondary  
20 assemblies 19. In this mode of operation, when the  
vehicle is stopped, noise and vehicle vibration as well  
as exhaust emissions can all be reduced markedly.

25 When the vehicle is rolling in the overrunning  
mode, depending on the power demand in the on-board  
vehicle electrical system and the power demand of the  
secondary assemblies 19, both the engine 13 and the  
secondary assembly drive 22 can be switched off and  
uncoupled via the clutches 14 and 21, respectively.  
Then the drive of the secondary assemblies 19 and the  
30 starter generator 20 in the generator mode for charging  
the accumulator battery 23 (Table, Case 4) continues to  
be effected via the driving clutch 15 and the



intermediate gear 18. In the event of a high electrical power demand or an inadequately charged accumulator battery 23, however, the secondary assembly drive 22 can still be added via the shift clutch 21.

5           If with the vehicle at a stop and the engine 13 switched off an air conditioner is being operated as one of the secondary assemblies 19, then a mechanical or electrical mode becomes possible by turning on the secondary assembly drive 22, and via the closed shift clutch 21, either the starter generator 20 is driven in 10 the generator mode and the air conditioner is driven mechanically via the secondary drive train 11, or the air conditioner is driven electrically by way of the electrical energy generated in the starter generator 20. 15 The driving clutch 15 and auxiliary clutch 14 are then open; see Table, Case 3. The same conditions for the operation of secondary assemblies 19 exist when the vehicle is stopped at a traffic light or in similar cases; see Table, Case 5. For the case in which the 20 secondary assemblies 19 are not driven mechanically, no mechanical coupling 27 is needed. Instead, the energy supply takes place via an electrical connection 28.

25           If the vehicle is to be accelerated from a stop, which is comparable to a situation at a traffic light, then to reduce noise and exhaust emissions, it is advantageous to the immediate vicinity of the traffic light for some of the drive power to be produced by the starter generator 20, since it is silent and does not produce exhaust gases. Simultaneously, the engine 13 30 and secondary assembly drive 22 are for instance turned on, and all the drive assemblies are coupled to one another via the clutches 14 and 21, with the driving

clutch 15 initially open, as in the Table, Case 6, so that the vehicle can then be put in motion via the closed driving clutch 15.

5 If conversely the power demand of the motor vehicle requires that the engine 13 be turned on in addition, then the secondary assembly drive 22 is preferably turned off whenever the efficiency of the engine 13 is improved as a result of the additional load on the secondary assemblies 19.

10 The engine 13 and the secondary assembly drive 22 are disposed in close integration so they can share a combined oil-and-coolant system and a unified exhaust system, so that preheating of the oil by the secondary assembly drive 22 also has advantages for the engine 13  
15 additionally turned on later. To improve the exhaust composition, the lambda sensor, known per se, can be used for both drives; this sensor continues to be kept at its optimal operating temperature even in the start and stop mode.

20 In the exemplary embodiment described here, the engine 13 should have a maximum power of 150 kW. The secondary assembly drive 22, conversely, is designed for a lower maximum power of 12 kW. The starter generator  
25 20 in the motor mode has a maximum power output of 3 kW. The result for the engine 13 and the secondary assembly drive 22 is a graduation that is comparable to the power gradient of the so-called drag moments upon starting of the cold or warm engine 13 and secondary assembly drive  
30 22. The warm drag moment of the secondary assembly drive 22 is about 5 Newton-meters here; conversely, the warm drag moment of the engine 13 is 50 Newton-meters.

For starting the drive system of the invention, first the secondary assembly drive 22 is started dynamically; that is, as a function of the measured temperature of the secondary assembly drive 22, the secondary assembly drive is started with direct starting or with impulse starting by the starter generator 20. When the secondary assembly drive 22 is warm, dynamic direct starting is performed, in that the driving clutch 15 and the auxiliary clutch 14 are opened and the shift clutch 21 is closed, and then the starter generator 20 is turned in the motor mode. The cold secondary assembly drive 22 is started with dynamic impulse starting, in that the driving clutch 15, auxiliary clutch 14 and shift clutch 21 are opened and the starter generator 20 is turned in the motor mode. Only after the starter generator 20 runs up to speed at approximately 1000 to 1500 rpm is the shift clutch 21 then closed, for starting the secondary assembly drive 22. The cold engine 13 can then be started. In this case fast impulse starting is possible in that the sum of the drive moments of the secondary assembly drive 22 and the starter generator 20 in the motor mode, plus the torques of the centrifugal masses of the intermediate gear 18, with the driving clutch 15 open and the shift clutch 21 closed, acts upon the engine 13 of the main drive train 10 with the closure of the auxiliary clutch 14 and starting thus occurs. When the engine 13 is warm, impulse starting with the starter generator 20 alone is also possible; the secondary assembly drive 22 is optionally turned off then and the shift clutch 21 is opened.

The drive system also allows purely electrical operation of the vehicle when the travel power demand is

very low, for instance in maneuvering. Here only the starter generator 20 communicates with the driving axle 17 of the vehicle, via the intermediate gear 18 and the driving clutch 15. For this mode, however, the electric controller and supply means 12 must monitor not only the charge state of the accumulator battery 23 but also the power demand of the secondary assemblies 19, so that if necessary the secondary assembly drive 22 can be started as well.

The travel readiness of the motor vehicle can be enhanced by providing that as soon as the driver door is opened, the secondary assembly drive 22 is started via the door contact 26. To preheat both the motor vehicle itself and the oil in an oil system shared by the engine 13 and the secondary assembly drive 22, provision is made for starting the secondary assembly drive 22 via the remote control 24 by enabling the starter generator 20 and the shift clutch 21 to be triggered via the remote-controlled electric controller and supply means 12.

The choice of operating mode of the motor vehicle drive, that is, between the engine 13 as the main drive and/or the secondary assembly drive 22 and/or the starter generator 20, is made via the electric controller and supply means 12, as a function of the power demand of the motor vehicle. In the simplest way, the choice of operating mode is made as a function of the drive pedal position of the motor vehicle, by means of the gas pedal sensor 25. The electric controller and supply means 12 includes the entire vehicle and battery management system for controlling the three clutches 14, 15 and 21 and for controlling the starter generator 20.

5 The Table below lists some preferred states of the components of the drive system of the invention as a function of the applicable operating mode. However, quite flexible deviations can be made from this layout of states via the engine management system, as a function of the battery state and the requisite mechanical and electrical power levels, without risking the low consumption values.

Type of operation	Driving clutch 15	Auxiliary clutch 14	Shift clutch 21	Secondary assembly drive 22	Internal combustion engine 13	Starter generator 20
High partial load to full load (Case 1)	closed	closed	open	OFF	ON	Generator mode
Low load (Case 2)	closed	open	closed	ON	OFF	As needed
Air conditioner on, vehicle stopped (Case 3)	open	open	closed	ON	OFF	Generator mode
Vehicle rolling, overrunning (Case 4)	closed	open	open	OFF	OFF	Generator mode
Stopped at traffic light (Case 5)	open	open	closed	ON	OFF	Generator mode
Starting from traffic light (Case 6)	open	closed	closed	ON	ON	Motor mode

## Claims

1. A drive system for motor vehicles, in particular having an internal combustion engine (13) as its main drive, a driving clutch (15), a transmission (16) and at least one drive axle (17) in the main drive train (10), furthermore having a secondary drive train (11) and having secondary assemblies (19) which can be disposed in the secondary drive train (11), the secondary drive train (11) being capable of being coupled to the main drive train, and having an electric machine operating as a starter generator (20), characterized in that the secondary drive train (11) has its own secondary assembly drive (22) which can be coupled to the starter generator (20), and that the secondary assembly drive (22) and the starter generator (20) can be coupled to the driving axle (17) of the motor vehicle either individually or jointly, with or without the main drive (13), to drive the motor vehicle.

2. The drive system of claim 1, characterized in that the main drive (13) or the secondary assembly drive (22) can be decoupled from the respectively selected drive (13 or 20 or 22) of the motor vehicle.

3. The drive system of claim 1 or 2, characterized in that the main drive and the secondary assembly drive (22) are each an internal combustion engine, and the power of the secondary assembly drive (22) is less than half the power of the engine (13) in the main drive train (10).

4. The drive system of claim 1, 2 or 3,

characterized in that for starting, the secondary assembly drive (22) is coupled to the starter generator (20) via a shift clutch (21).

5. The drive system of claim 4, characterized in that for starting, the main drive (13) can be coupled to the running secondary assembly drive (22).

6. The drive system of one of the foregoing claims, characterized in that the secondary assembly drive (22) and the starter generator (20) are connected to the main drive train (10) via an intermediate gear (18).

7. The drive system of claim 6, characterized in that the intermediate gear (18) is connected on the inlet side to the starter generator (20) and on the outlet side can be decoupled both from the transmission (16) via the driving clutch (15) and from the main drive (13) in the main drive train (10) via an auxiliary clutch (14).

8. The drive system of claim 7, characterized in that in starting of the secondary assembly drive (22), the driving clutch (15) and the auxiliary clutch (14) in the main drive train (10) are opened.

9. The drive system of claim 8, characterized in that for direct starting of the secondary assembly drive (22), the driving clutch and the auxiliary clutch (15, 14) are opened, and the shift clutch (21) is closed.

10. The drive system of claim 8, characterized in that for impulse starting of the secondary assembly



drive (22), the auxiliary clutch, driving clutch and shift clutch (14, 15, 21) are opened, and that the shift clutch (21) should be closed only after the starter generator (20) has run up to speed.

11. The drive system of claims 9 and 10, characterized in that by means of detection of the temperature of the secondary assembly drive (22), its starting operation can be switched over between direct starting and impulse starting as a function of temperature.

12. The drive system of claim 7, characterized in that for direct starting of the main drive (13) with the secondary assembly drive (22) running, the driving clutch (15) is opened, and the auxiliary clutch (14) and the shift clutch (21) are closed.

13. The drive system of claim 7, characterized in that for the impulse starting of the main drive (13) with the secondary assembly drive (22) running, the driving clutch (15) is opened, the shift clutch (21) is closed, and the auxiliary clutch (14) should be closed only after the intermediate gear (18) has run up to speed.

14. The drive system of claims 12 and 13, characterized in that by means of detection of the temperature of the main drive (13), its starting operation can be switched over between direct starting and impulse starting as a function of temperature.

15. The drive system of claim 14, characterized in that both in direct starting and in impulse starting

of the main drive (13), the starter generator (20) in the motor mode is jointly activated.

5 16. The drive system of claim 7, characterized in that for starting the secondary assembly drive (22), the starter generator (20) and the shift clutch (21) can be triggered via a remote-controllable electric controller and supply means (12).

17. The drive system of claim 7, characterized in that for starting the secondary assembly drive (22), the starter generator (20) and the shift clutch (21) can be triggered when the driver door is opened via a door contact (26).

5 18. The drive system of one of the foregoing claims, characterized in that when the travel power demand is very low and the battery charge is adequate, only the starter generator (20) is employed for driving the motor vehicle, by means of the electric controller and supply means (12).

19. The drive system of one of the foregoing claims, characterized in that when the driving power demand is low, only the secondary assembly drive (22) is used for driving the motor vehicle.

20. The drive system of one of the foregoing claims, characterized in that when the driving power demand is high, the secondary assembly drive (22) and main drive (13) are jointly used for driving the motor vehicle.

21. The drive system of one of the foregoing

claims, characterized in that when the driving power demand is briefly at maximum, both the secondary assembly drive (22) and main drive (13) as well as the starter generator (20) in the motor mode are used for driving the motor vehicle.

22. The drive system of one of claims 18-21, characterized in that the choice of operating mode of the motor vehicle drive, that is, the choice between the main drive (13) and/or the secondary assembly drive (22) and/or the starter generator (20), is made via an electric controller and supply means (12).


23. The drive system of claim 22, characterized in that the choice of operating mode is made as a function of the position of the gas pedal of the motor vehicle, which is detected via a gas pedal sensor (25).

24. The drive system of one of the foregoing claims, characterized in that the secondary assemblies (19) are drivable either mechanically by the secondary drive train (11) or electrically.

## Abstract

The invention relates to a drive system for motor vehicles with in particular an internal combustion engine (13) as the main drive in the main drive train (10) of the motor vehicle, having secondary assemblies (19) of the motor vehicle that are to be driven and having a secondary drive train (11) that is coupled with the main drive train, and having an electric machine operating as a starter generator (20). To optimize the power balance and fuel consumption of a drive system of this kind, it is provided that the secondary drive train (11) has its own secondary assembly drive (22), which can be coupled to the starter generator (20), and that the secondary assembly drive (22) and the starter generator (20) can be coupled either individually or jointly, with or without the main drive (13), to the driving axle (17) of the motor vehicle to drive the motor vehicle.

(Figure)

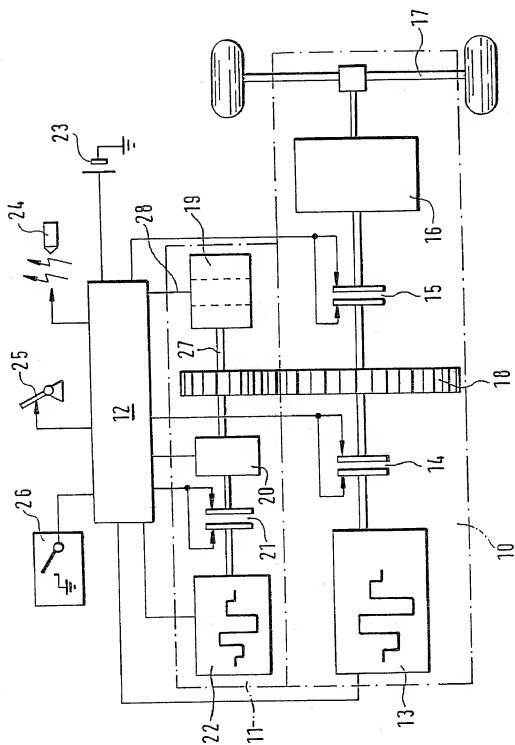

**DECLARATION AND POWER OF ATTORNEY FOR NATIONAL STAGE OF PCT. PATENT APPLICATION**

As a below-named inventor, I hereby declare that:

Peter AHNER  
Manfred ACKERMANN

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **DRIVE SYSTEM FOR MOTOR VEHICLES** the specification of which was filed as PCT International Application number PCT/DE 00/02347 on July 19, 2000.

I hereby state that I believe the named inventor or inventors in this Declaration to be the original and first inventor or inventors of the subject matter which is claimed and for which a patent is sought.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365 (b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior foreign application(s):

Priority claimed:

199 34 790.5	GERMANY	JULY 27, 1999	X	
(Number)	(Country)	(Date filed)	Yes	No
			Yes	No

As a named inventor, I hereby appoint the following attorney to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

/ Michael J. Striker, Reg. No. 27233

Direct all telephone calls to Striker, Striker & Stenby at telephone no.: (631) 549 4700 and address and all correspondence to:

STRIKER, STRIKER & STENBY  
103 East Neck Road  
Huntington, New York 11743  
U.S.A.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such wilful false statement may jeopardize the validity of the application or any patent issued thereon.

Signature: X <i>Peter Ahner</i>	Date: X 08.02.2001	Residence and Full Postal Address: Kirchheimer Strasse 18 71032 Boeblingen Germany <i>DEX</i>
Full Name of First or Sole Inventor: <u>Peter AHNER</u>	Citizenship: GERMAN	
Signature: X <i>Manfred Ackermann</i>	Date: X 09.02.2001	Residence and Full Postal Address: Mittelgasse 3 71570 Oppenweiler Germany <i>DEX</i>
Full Name of Second Inventor: <u>Manfred ACKERMANN</u>	Citizenship: GERMAN	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Third Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Fourth Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Fifth Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Sixth Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Seventh Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Eighth Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Ninth Inventor:	Citizenship:	